

TREDIT

TIRE & WHEEL

2025

PRODUCT CATALOG

Performance You Can Trust, Value You Deserve



www.tredittire.com

FOLLOW US ON:



TABLE OF CONTENTS



INTRODUCTION & SERVICES:

● About Us: -----	Pg. 2-3
● After Sales Programs: -----	Pg. 4-5
● Tire Product Overview: -----	Pg. 6
● Wheel Product Overview: -----	Pg. 7



RADIAL ST TIRES:

● Rainier ST: -----	Pg. 8
● Rainier ST Longhaul & Trailer King: -----	Pg. 9
● Hankook Vantra & Goodyear Endurance: -----	Pg. 10



RADIAL ALL-STEEL TIRES:

● Rainier ST All-Steel: -----	Pg. 11
● Sailun All-Steel: -----	Pg. 12
● Cooper & Uniroyal: -----	Pg. 13
● Hankook TH3: -----	Pg. 14
● Goodyear Commercial: -----	Pg. 15



RADIAL OFF-ROAD TIRES:

● Rainier ST Apex: -----	Pg. 16
● Hankook Dynapro & Goodyear Wrangler: -----	Pg. 17



BIAS ST TIRES:

● Eco-Trail ST: -----	Pg. 18
-----------------------	--------



STEEL WHEELS:

● Steel Modular & Spoke: -----	Pg. 19
● Steel Directionals, Conventional, & Duals: -----	Pg. 20



ALUMINUM WHEELS:

● Avalanche, Edge, Evolution: -----	Pg. 21
● A1411, Altitude, Pinnacle, Sidewinder, Aluminum Mod: -----	Pg. 22
● Thoroughbred, T02, T03, Magnum, Aviator, & Navigator: -----	Pg. 23



WHEEL ACCESSORIES:

● Center Caps: -----	Pg. 24
● Lug Nuts: -----	Pg. 25
● Tire Pressure Monitoring System (TPMS): -----	Pg. 26
● Balancing Beads: -----	Pg. 27

ABOUT

US

At **Tredit Tire & Wheel**, we not only supply trailer tires & wheels- we deliver confidence on the road. As a trusted leader in the trailer tire industry, we partner with Original Equipment Manufacturers (OEMs), wholesale distributors, and replacement markets across North America to provide safe, reliable, and cost-effective solutions. Our commitment goes beyond products; we prioritize strong relationships, exceptional service, and innovative logistics to keep you moving forward. Built on integrity and the Golden Rule, we believe that people are our greatest asset—because when you succeed, we succeed!



OUR COMMITMENT



SOURCING

- Global & Domestic Product Sourcing
- Product Testing & Validation
- Market Feedback to Manufacturer
- Multinational Procurement Experts
- Product Design



SUPPORT

- Warranty & Roadside Assistance
- Customized Packaging & Labeling
- Customer Service
- Legal & Regulatory Advocacy
- Aftermarket Availability
- Finance & Credit
- Technical Support



DISTRIBUTION

- Depth of Product & Value Assortment
- Availability
- Format (Mounted/Loose)
- Accessories
- Warehouse & Storage
- Logistics

ABOUT US

TREDIT FACILITIES:

Spanning **600,000 SQ. FT.**. Across **SIX** Distribution Centers Nationwide.

TREDIT LOCATIONS:

- 📍 **ELKHART, IN** (*Corporate*)
- 📍 **BOARDMAN, OR**
- 📍 **ARLINGTON, TX**
- 📍 **ATHENS, GA**
- 📍 **PLANT CITY, FL**
- 📍 **YORK, PA**



ELKHART, IN

3305 CHARLOTTE AVE,
ELKHART, IN 46517
(*Corporate Office*)
• 210,000 Sq. Ft. Warehouse
📞 Phone: (855) 887-3348
✉ Email: elkhartsales@tredittire.com



ATHENS, GA

465 OLD HULL RD,
ATHENS, GA 30601
• 43,250 Sq. Ft. Warehouse
📞 Phone: (706) 548-8333
✉ Email: gasales@tredittire.com



BOARDMAN, OR

73075 LEWIS & CLARK DR.,
BOARDMAN, OR 97818
• 70,000 Sq. Ft. Warehouse
📞 Phone: (866) 317-6987
✉ Email: orsales@tredittire.com



PLANT CITY, FL

1719 COUNTY LINE RD,
PLANT CITY, FL 33566
• 103,000 Sq. Ft. Warehouse
📞 Phone: (888) 664-6656
✉ Email: flsales@tredittire.com



ARLINGTON, TX

3900 NEW YORK AVE,
ARLINGTON, TX 76014
• 108,480 Sq. Ft. Warehouse
📞 Phone: (877) 320-8205
✉ Email: txsales@tredittire.com



YORK, PA

2645 BLACKTHORNE CT,
YORK, PA 17406
• 62,500 Sq. Ft. Warehouse
📞 Phone: (717) 699-5905
✉ Email: pasales@tredittire.com

Follow Us!



After Sales Programs



TREDIT


MOBILE APP

The **ULTIMATE APP** for Trailer Tire **MANAGEMENT**

The Tredit App is a comprehensive solution for trailer tire management & roadside assistance—designed to provide peace of mind for both experienced travelers and weekend adventurers.



SCAN QR CODE
FOR MORE INFO!

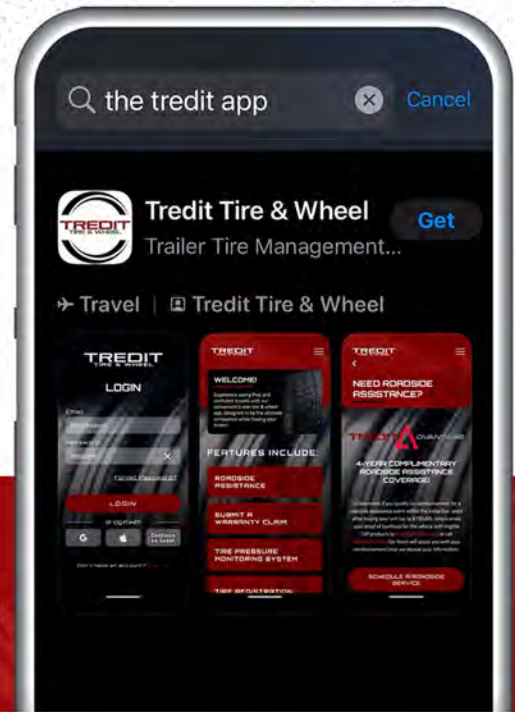

ROADSIDE ASSISTANCE

The Tredit Mobile App offers integrated roadside assistance through the **Tredit Advantage Program™**, powered by Urgent.ly. Request a service directly through the app, receive upfront estimates, and track the arrival of assistance in real-time.




TPMS (Tire Pressure Monitoring System)

Connect the Bluetooth TPMS sensors on your trailer tires to the app for real-time monitoring of tire PSI and temperature. If enabled, the app will notify you if your trailer tires' PSI and temperature hit dangerous levels.



WARRANTY

Easily fill-out and submit warranty claims through the app. Upload, or snap a photo of your product through the app and receive guidance on getting your tires repaired or replaced.

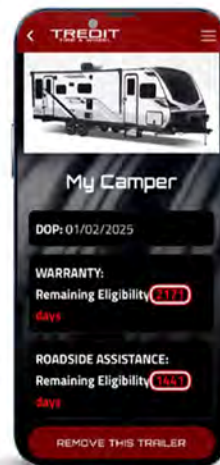

TRAILER PROFILE

Add multiple trailers and keep all your trailer tire information organized in one place. The app automatically displays your remaining warranty and roadside assistance eligibility.



**FREE
DOWNLOAD!**

Download on the
App Store



GET IT ON
Google Play



TREDIT ADVANTAGE

► What is Tredit Advantage™

Through the **Tredit Advantage™** Program, you gain access to a nationwide network of qualified roadside assistance professionals. This provides you with the fastest, safest, and most innovative roadside services- giving you the freedom to travel with complete confidence and peace of mind!

► Reimbursement Process:

- Download the **Tredit App** from your Apple App/Google Play Store.
- Login, then tap on "Roadside Assistance" from the homescreen.
- Tap on "Schedule a Roadside Service" button, and select a roadside service.
- Enter your information and receive an up-front estimate for the roadside service -then dispatch the request.
- Once the roadside service has been completed, pay for the service and keep the receipt.
- Contact Tredit Tire & Wheel for reimbursement (up to \$150) within 30-days of roadside service event.
 - * Email: warranty@tredittire.com
 - * Phone: (855)- 887-3348



► What Services Are Covered?



• Tire Change

Need help changing that tire? Tredit Advantage is here to help with 24/7 roadside assistance coverage.

• Car Lockout

Don't let a lockout ruin your day! Tredit Advantage offers a speedy unlocking service that's just a few clicks away.

• Gas Delivery

Happen to miss that last gas station? Tredit Advantage will bring enough fuel to help you make it to the next stop.

• Towing

Don't stress looking for a company to tow your vehicle. Tredit Advantage is here to get you hitched and back on the road!

• Jump Start

Have a dead battery? Tredit Advantage, can help you revive it and get you back on the road quickly.

• Key Replacement

Lose your keys? Tredit Advantage is here to get you back on the road with our key replacement service.



Guarantees. Simplified.

► What is the Guarantees. Simplified™ Program?

- **(1-YEAR)** No questions asked tire and wheel replacement program.
- **ALL** tires & wheels equipped by **Tredit Tire & Wheel** are covered for the first year.
 - * All Brands (Tredit, Goodyear, Hankook, TBC, Michelin).
- Visit- www.tredittire.com/guarantees-simplified/ to fill out a simple claim form.

COVERAGE EXAMPLES:

► ROAD HAZARDS

► IMPACT DAMAGE


► TIRE CUTS/SNAGS

► USER ERROR

TYPES OF TIRE WEAR



TIRE SIDEWALL: IDENTIFICATION DIAGRAM

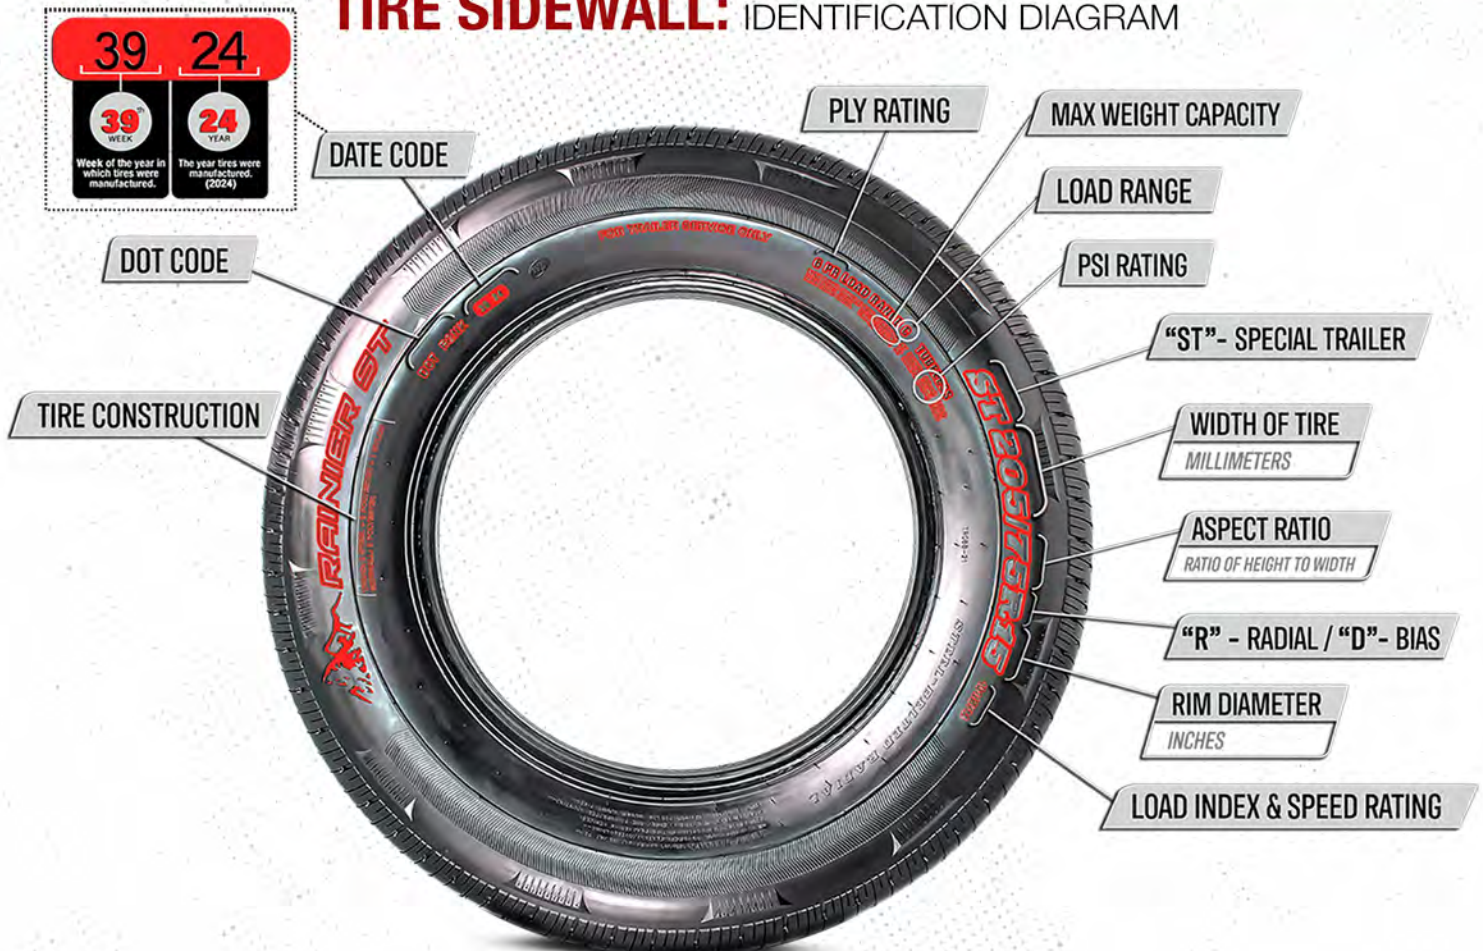

WHEEL TORQUE SPECS RECOMMENDED FTLBS.

Wheel Size	Bolt Pattern	Offset	Steel Wheels Recommended Torque (ftlbs.)	Aluminum Wheels Recommended Torque (ftlbs.)
12"	4-4" or 5-4.5"	0"	50-75	95-105
13"	4-4" or 5-4.5"	0"	50-75	95-105
14"	5-4.5"	0"	90-120	110-120
15"	5-4.5"	0"	90-120	110-120
15"	6-5.5"	0"	100-120	110-120
16" (1/2" Stud)	6-5.5" or 8-6.5"	0"	100-120	110-120
16" (9/16" Stud)	8-6.5"	0"	110-120	125-130
17.5" (9/16" Stud)	8-6.5"	0"	125-130	125-130
17.5" (5/8" Stud)	8-6.5"	0"	275-325 (Flange Nut)	150

LUG NUT INSTALL


SEQUENCE(S):



IMPORTANT:


To ensure safety and performance, it is important to use a properly calibrated torque wrench to check the torque values of all lug nuts on a new tire & wheel assembly after the first **10, 25, and 50 miles**- with ongoing checks during normal use. This procedure must be repeated whenever the lug nuts are removed from the wheel.

WHEEL OFFSET ILLUSTRATED DIAGRAM

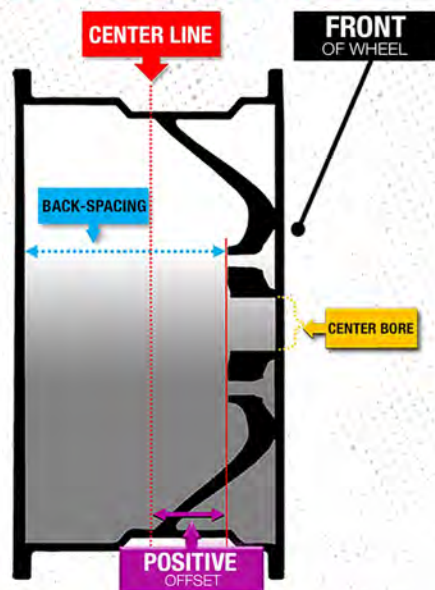


POSITIVE OFFSET

When the hub mounting surface is located in front of the wheel's center line (closer to the street side).

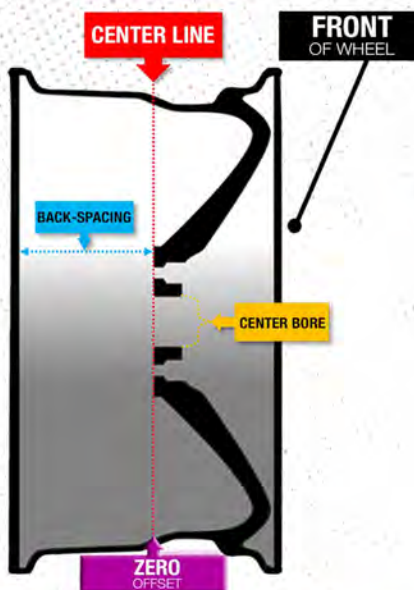

ZERO OFFSET

When the hub mounting surface aligns with the centerline of the wheel wells.

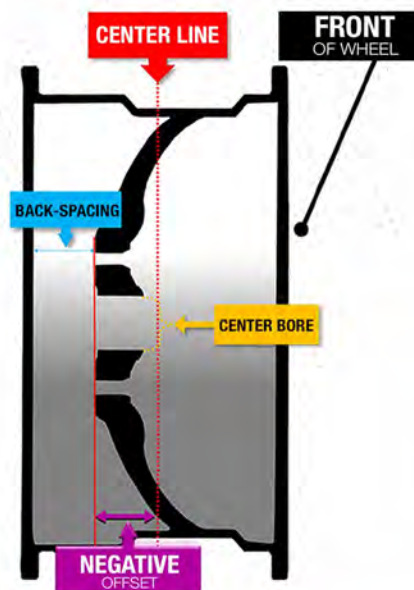

NEGATIVE OFFSET

When the hub mounting surface is positioned behind the wheel's centerline.



TIRE PERFORMANCE AT THE HIGHEST STANDARDS

The Rainier ST was designed with original equipment manufacturers in mind. With a light truck inspired tread pattern, added durability, and high load capacity, the Rainier ST is built to handle the tough challenges your trailer faces.

TOP FITTED
TRAILER TIRE FOR
O.E.M IN NORTH AMERICA



6-YEAR LIMITED WARRANTY!



VARIED TREAD PITCH

Designed to Help Reduce Road Noise.



SOLID MAIN TREAD BLOCKS

Enhances Self-Cleaning Ability.



WIDER CENTER RIB

Improves Wet Traction and Lower Rolling Resistance.



INTEGRATED TREAD BLADES

Enhances Road Grip in All Weather Conditions.

WIDER CENTER RIB

Improves Wet Traction & Lower Rolling Resistance.

SOLID MAIN TREAD BLOCKS

Enhances Self-Cleaning Ability.

TIRE FEATURES:

- ▶ Exceptional Load Capacity.
- ▶ High Performance Under Extreme Conditions.
- ▶ Light Truck Inspired Tread Pattern.



Scan QR Code for Additional Features & Benefits of the Rainier ST.

Tire Size	Load Range/Ply	Section Width	Overall Diameter	Max Load Capacity	Operating Inflation	Speed Rating
ST205/65R10	E/10	7.9"	20.3"	1,660 LBS.	90 PSI	L-75 MPH
ST145R12	D/8	5.5"	21.5"	1,220 LBS.	65 PSI	M-81 MPH
ST145R12	E/10	5.5"	21.5"	1,520 LBS.	80 PSI	M-81 MPH
ST175/80R13	C/6	7"	23.9"	1,360 LBS.	50 PSI	M-81 MPH
ST175/80R13	D/8	7"	23.9"	1,610 LBS.	65 PSI	M-81 MPH
ST185/80R13	C/6	7.4"	24.4"	1,480 LBS.	50 PSI	M-81 MPH
ST185/80R13	D/8	7.4"	24.4"	1,710 LBS.	65 PSI	M-81 MPH
ST205/75R14	C/6	8"	26.1"	1,760 LBS.	50 PSI	M-81 MPH
ST205/75R14	D/8	8"	26.1"	2,040 LBS.	65 PSI	M-81 MPH
ST205/75R15	C/6	8.1"	26.9"	1,820 LBS.	50 PSI	M-81 MPH
ST205/75R15	D/8	8.1"	26.9"	2,150 LBS.	65 PSI	M-81 MPH
ST215/75R14	C/6	8.3"	26.5"	1,870 LBS.	50 PSI	M-81 MPH
ST215/75R14	D/8	8.3"	26.5"	2,200 LBS.	65 PSI	M-81 MPH
ST225/75R15	D/8	8.8"	28.1"	2,540 LBS.	65 PSI	M-81 MPH
ST225/75R15	E/10	8.8"	28.1"	2,860 LBS.	80 PSI	M-81 MPH
ST235/80R16	E/10	9.3"	30.8"	3,520 LBS.	80 PSI	M-81 MPH
ST235/80R16	F/12	9.3"	30.8"	3,860 LBS.	100 PSI	M-81 MPH
ST235/85R16	E/10	9.3"	31.7"	3,640 LBS.	80 PSI	M-81 MPH
ST235/85R16	F/12	9.3"	31.7"	3,960 LBS.	95 PSI	M-81 MPH

RADIAL ST TIRE

RAINIER ST LONGHAUL

RELIABLE PERFORMANCE & PEACE OF MIND ON EVERY JOURNEY

Invest in the Rainier ST Longhaul trailer tires for a reliable and high-quality driving experience. With a 6-year limited warranty and roadside assistance, you can hit the road with peace of mind. Benefit from the consumer-centered tire design, which includes a treadwear indicator, clearly displayed inflation pressure requirements, and the user-friendly "Tire Size" details stamped on the sidewall.



6-YEAR LIMITED WARRANTY!



TREADWEAR INDICATORS BUILT INTO THE TREAD PATTERN.



WIDE TREAD GROOVES FOR OPTIMIZED PERFORMANCE IN WET CONDITIONS.



ENGINEERED FOR EXCEPTIONAL HEAT DISSIPATION & EXTENDED TREAD LIFE.



Tire Size	Load Range/Ply	Section Width	Overall Diameter	Max Load Capacity	Operating Inflation	Speed Rating
ST205/75R15	C/6	8"	27.1"	1,820 LBS.	50 PSI	M-81 MPH
ST225/75R15	D/8	8.8"	28.30"	2,540 LBS.	65 PSI	M-81 MPH
ST235/80R16	E/10	9.30"	30.80"	3,520 LBS.	80 PSI	M-81 MPH

RADIAL ST TIRE

TRAILER KING RST

SAFETY, RELIABILITY, AND LONG LASTING PERFORMANCE

Manufactured to deliver the highest standards of safety, reliability, and comfort. Trailer King tires have an innovative tread design that provides consistent, even tracking. The optimized tread compound yields improved wear and longer mileage.



6-YEAR LIMITED WARRANTY!



CENTER GROOVES FOR CONSISTENT, EVEN TRACKING.



ENHANCED SHOULDER TREAD DESIGN PROVIDES BETTER HEAT DISSIPATION.



NYLON OVERLAY ON SELECT SIZES.



Tire Size	Load Range/Ply	Section Width	Overall Diameter	Max Load Capacity	Operating Inflation	Speed Rating
ST175/80R13	C/6	6.9"	24"	1,360 LBS.	50 PSI	M-81 MPH
ST175/80R13	D/8	6.9"	24"	1,570 LBS.	65 PSI	M-81 MPH
ST185/80R13	C/6	7.2"	24.6"	1,480 LBS.	50 PSI	M-81 MPH
ST185/80R13	D/8	7.2"	24.6"	1,710 LBS.	65 PSI	M-81 MPH
ST205/75R14	C/6	8"	26.1"	1,760 LBS.	50 PSI	M-81 MPH
ST205/75R14	D/8	8"	26.1"	2,040 LBS.	65 PSI	M-81 MPH
ST215/75R14	C/6	8.5"	26.7"	1,870 LBS.	50 PSI	M-81 MPH
ST215/75R14	D/8	8.5"	26.7"	2,200 LBS.	65 PSI	M-81 MPH
ST205/75R15	C/6	8"	27.1"	1,820 LBS.	50 PSI	M-81 MPH
ST205/75R15	D/8	8"	27.1"	2,150 LBS.	65 PSI	M-81 MPH
ST225/75R15	D/8	8.8"	28.3"	2,540 LBS.	65 PSI	M-81 MPH
ST225/75R15	E/10	8.8"	28.3"	2,860 LBS.	80 PSI	M-81 MPH
ST235/80R16	E/10	9.3"	30.8"	3,520 LBS.	80 PSI	M-81 MPH
ST235/80R16	F/12	9.3"	30.8"	3,860 LBS.	100 PSI	M-81 MPH
ST235/85R16	E/10	9.3"	31.7"	3,640 LBS.	80 PSI	M-81 MPH
ST235/85R16	F/12	9.3"	31.7"	3,960 LBS.	95 PSI	M-81 MPH



RADIAL ST TIRE

Hankook
driving emotion

TREDIT
TIRE & WHEEL

vanTRA TRAILER



ULTIMATE STRENGTH, DEPENDABILITY, AND HIGH PERFORMANCE

Experience the ultimate ST tire in durability and stability with the all new Vantra Trailer ST tires, by Hankook. With an optimized tread pattern design, the Vantra ST provides superior traction control in all road conditions, ensuring a safe and smooth ride.



6-YEAR LIMITED WARRANTY!



OPTIMIZED TREAD PATTERN DESIGN

Improves traction control in all road conditions.



ADVANCED TIRE STRUCTURE TECHNOLOGY

Enhanced durability & stability in heavy-duty conditions.



HIGHWAY SPEED RATINGS

Speed rated with a N-rating (87 mph).

Tire Size	Load Range/Ply	Section Width	Overall Diameter	Max Load Capacity	Operating Inflation	Speed Rating
ST205/75R14	D/8	7.9"	26.2"	2,040 LBS.	65 PSI	N-87 MPH
ST215/75R14	D/8	8.5"	26.7"	2,200 LBS.	65 PSI	N-87 MPH
ST205/75R15	D/8	8"	27.1"	2,150 LBS.	65 PSI	N-87 MPH
ST225/75R15	E/10	8.9"	28.3"	2,830 LBS.	80 PSI	N-87 MPH
ST235/80R16	E/10	9.5"	30.9"	3,420 LBS.	80 PSI	N-87 MPH
ST235/85R16	E/10	9.5"	31.7"	3,640 LBS.	80 PSI	N-87 MPH
ST255/85R16	E/10	10.3"	33.1"	4,080 LBS.	80 PSI	N-87 MPH



HIGH STIFFNESS

Pattern block ratio design optimized for heavy loads.

DECOUPLING GROOVE

Optimized decoupling groove prevents heat generation in the shoulder.

GROOVE STIFFNESS

Each groove designed with high stiffness for durability.

RADIAL ST TIRE

GOODYEAR
ENDURANCE



ENGINEERED USING CUTTING-EDGE TOWING TECHNOLOGIES



Whether you're tackling work-related tasks, or embarking on a recreational adventure, the Goodyear Endurance-enhanced with Durawall Technology, is meticulously crafted to empower you with unwavering confidence throughout your towing journey.



6-YEAR LIMITED WARRANTY!



OPTIMIZED TREAD DEPTH AND DECOUPLING GROOVES

Helps the tire remain cool while towing heavy loads.



SPECIALIZED INNER LINER

Minimizes air loss because of 100% Halobutyl rubber.



DURAWALL TECHNOLOGY

Helps resist sidewall cuts and punctures.

Tire Size	Load Range/Ply	Section Width	Overall Diameter	Max Load Capacity	Operating Inflation	Speed Rating
ST205/75R14	D/8	7.9"	26.14"	2,040 LBS.	65 PSI	N-87 MPH
ST215/75R14	D/8	8.5"	26.7"	2,200 LBS.	65 PSI	N-87 MPH
ST205/75R15	D/8	7.9"	27.13"	2,150 LBS.	65 PSI	N-87 MPH
ST225/75R15	E/10	8.7"	28.31"	2,830 LBS.	80 PSI	N-87 MPH
ST235/80R16	E/10	9.2"	30.79"	3,420 LBS.	80 PSI	N-87 MPH
ST235/85R16	E/10	9.2"	31.73"	3,640 LBS.	80 PSI	N-87 MPH
ST255/85R16	E/10	10.4"	33.07"	4,080 LBS.	80 PSI	N-87 MPH



ADVANCED SIDEWALL PROTECTION

Scuff Guard helps shield tire sidewall from natural wear and tear.

KEEPING COOL

Optimized tread depth & decoupling grooves keep tire cool while towing.

REDUCED AIR LOSS

Specialized inner liner minimizes air loss because of the 100% Halobutyl rubber.



BUILT FOR STRENGTH, PERFORMANCE, AND THE OPEN ROAD

Hit the road with confidence by equipping your trailer with **Rainier ST All-Steel** trailer tires. Specifically designed for today's modern RV's and cargo units, the Rainier ST All-Steel can handle the heaviest loads with ease, while guaranteeing superior load capacity.



8-YEAR LIMITED WARRANTY!



DURABLE ALL-STEEL SIDEWALL:

For Trail Use & High Carrying Capacity.




HIGHWAY TREAD PATTERN:

Provides Smooth Towing & Better Fuel Economy.



DEEP TREAD DEPTH:

Prolongs On-Road Service.

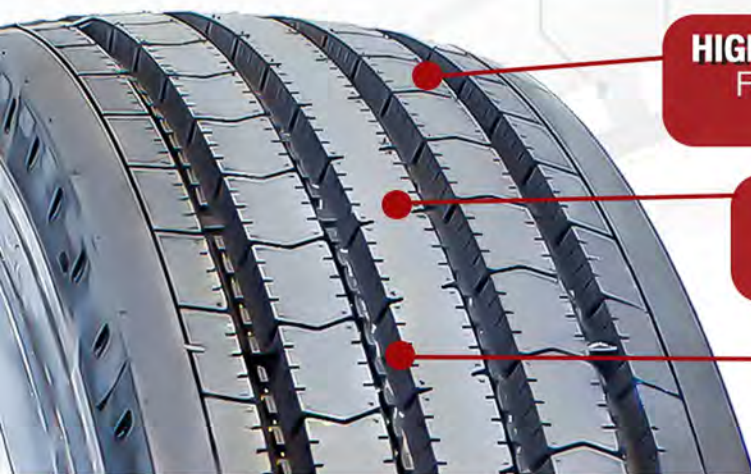

HIGHWAY TREAD PATTERN

For Smooth Rolling on
All Highways.

OPTIMIZED DESIGN

Balancing Long Wear with
All-Season Traction.

PROTECTIVE TREAD

Stone Ejectors Designed to
Keep the Tread Clear of Debris.



Tire Size	Load Range/Ply	Section Width	Overall Diameter	Max Load Capacity	Operating Inflation	Speed Rating
ST225/75R15	F/12	8.6"	28.1"	3,305 LBS.	95 PSI	M-81 MPH
ST235/80R16	G/14	9.22"	30.7"	4,080 LBS.	110 PSI	M-81 MPH
ST235/80R16	H/16	9.3"	30.8"	4,190 LBS.	110 PSI	M-81 MPH
ST235/85R16	G/14	9.3"	31.7"	4,400 LBS.	110 PSI	M-81 MPH
ST235/85R16	H/14	9.3"	31.7"	4,540 LBS.	110 PSI	M-81 MPH
215/75R17.5	J/18	8.3"	30.2"	4,805 LBS.	125 PSI	M-81 MPH
235/75R17.5	J/18	9.2"	31.4"	6,005 LBS.	125 PSI	M-81 MPH

UNMATCHED **STRENGTH, EFFECIENCY,** AND **RELIABILITY**

Elevate your towing experience with **Sailun All-Steel** trailer tires, built tough for RV's, 5th wheels, utility, and boat trailers. This all-steel highway rib tire delivers unmatched strength and load capacity. Engineered with multi-sipes for enhanced wet traction, and a solid shoulder to combat wear and boost fuel efficiency.



8-YEAR LIMITED WARRANTY!



MULTI-SIPES IN TREAD

Improve Traction in Wet Conditions and Dissipate Heat for Prolonged Tread Life.



SHALLOW TREAD

Designed to Reduce Rolling Resistance for Better Fuel Milage.



UNIQUE TREAD WALL GROOVES

Helps Reduce Irregular Wear & Improve Traction.



TREAD PATTERN DESIGN

Multi-Sipes Improve Traction in Wet Conditions.



ROBUST TREAD ENGINEERING

Unique Tread Wall Grooves Help Reduce Irregular Wear.



LONG SERVICE INTERVAL

Shallow Tread Designed to Reduce Rolling Resistance.



Tire Size	Load Range/Ply	Section Width	Overall Diameter	Max Load Capacity	Operating Inflation	Speed Rating
ST235/80R16	G/14	9.3"	30.8"	4,080 LBS.	110 PSI	L-75 MPH
ST235/85R16	G/14	9.3"	31.7"	4,400 LBS.	110 PSI	L-75 MPH
215/75R17.5	H/16	8.1"	30.4"	4,805 LBS.	125 PSI	L-75 MPH
235/75R17.5	H/16	8.9"	31.6"	6,005 LBS.	125 PSI	L-75 MPH

RADIAL ALL STEEL COMMERCIAL TIRE



COOPERTIRES®



BUILT FOR HEAVY-DUTY PERFORMANCE

The **Cooper Work Series RHT 2**, provides your fleet a high scrub and cut chip resistant trailer tire- which is built to take on severe turning on both tandem and spread axle trailers.



6-YEAR LIMITED WARRANTY!



ENGINEERED TO ENDURE THE RIGORS ASSOCIATED WITH SPREAD AXLE APPLICATIONS.



HIGH SCRUB & CHIP RESISTANT TREAD COMPOUND.

WEAR SQUARE® VISUAL INDICATOR



Tire Size	Load Range/Ply	Section Width	Overall Diameter	Max Load Capacity	Operating Inflation	Speed Rating
215/75R17.5	H/16	8.5"	30.5"	4,805 LBS.	125 PSI	N/A

RADIAL ALL STEEL COMMERCIAL TIRE

UNIROYAL®



DRIVE **FARTHER**, LAST **LONGER** WITH THE **UNIROYAL® RS2**

Get more out of every drive with the **Uniroyal RS2**. Its advanced ribbed tread pattern ensures even pressure distribution, while a high-tech silica compound resists wear, extending the life of your tires. The result? Longer tread life, reliable performance, and lasting confidence on the road.



6-YEAR LIMITED WARRANTY!

- PERFORM IN HIGH SCRUB ENVIRONMENTS WITH ADVANCED COMPOUNDS.
- REDUCE IRREGULAR WEAR WITH THE USE OF MICRO SIPING.
- ENHANCED WET TRACTION WITH FOUR LARGE GROOVE CHANNELS.
- REDUCED STONE RETENTION WITH A ZIG-ZAG CHANNEL GROOVE.

Tire Size	Load Range/Ply	Section Width	Overall Diameter	Max Load Capacity	Operating Inflation	Speed Rating
215/75R17.5	H/16	8.58"	30.42"	4,805 LBS.	125 PSI	L-75 MPH



BUILT TO HAUL, ENGINEERED TO LAST

The **Hankook Smart Flex TH31** tires are your ultimate choice for rugged journeys. Crafted with a cutting-edge rubber compound, the TH31 promises extended tread life by combating uneven wear. Plus, a fortified sidewall defends against cuts, chips, and abrasions- safeguarding both tire and wheel.



6-YEAR LIMITED WARRANTY!

SMART Flex TH31



NEW COMPOUND MIXING SYSTEM

The new mixing system, Innovation Mixing System, (IMS), minimizes disconnection of polymer chains & oxidation.




CHIP-CUT COMPOUND

Enhances durability for severe conditions.




MAIN ZIG-ZAG GROOVE

Provides excellent traction and water drainage under various road conditions.

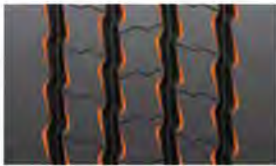

GROOVE SLANT DESIGN

Slanted groove design helps to prevent chunking.

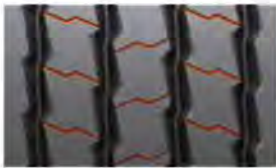

LATERAL SEMI-GROOVE

Lateral groove helps improve initial traction performance.



Tire Size	Load Range/Ply	Section Width	Overall Diameter	Max Load Capacity	Operating Inflation	Speed Rating
ST235/80R16	G/14	9.2"	30.8"	3,640 LBS.	110 PSI	M-81 MPH
ST235/85R16	G/14	9.3"	31.6"	3,860 LBS.	110 PSI	M-81 MPH
215/75R17.5"	H/16	8.4"	30.5"	4,805 LBS.	123 PSI	65 MPH
235/75R17.5"	J/18	9.4"	31.5"	6,005 LBS.	127 PSI	65 MPH



DURABLE. RELIABLE. DEPENDABLE PERFORMANCE

Engineered for regional commercial trailers, the **Goodyear G614** and **G114** delivers dependable performance mile after mile. Its shallow tread design promotes flexibility across varying temperatures while enduring even wear for extended tread life. With rounded shoulder ribs for enhanced stability and a reinforced casing built to handle heavy-duty demands and multiple retreads, this tire is ready to keep your fleet rolling strong.



BUILT FOR LONGEVITY

Shallow Tread Design Ensures Even Wear and Longer Tread Life.



ENHANCED STABILITY

Rounded Shoulder Ribs Provide Improved Handling and Tire Stability.



HEAVY-DUTY PERFORMANCE

Reinforced Casing Supports Multiple Retreads and Demanding Loads.

Tire Size	Mfg. Part #	Load Range/Ply	Section Width	Overall Diameter	Max Load Capacity	Operating Inflation	Speed Rating
LT235/85R16	139-229-099	G/14	9.3"	31.7"	3,750 LBS.	110 PSI	L-75 MPH
LT215/75R17.5	756-246-567	H/16	8.3"	30.2"	4,805 LBS.	125 PSI	J-62 MPH



THE ULTIMATE OFF-ROAD TRAILER TIRE FOR ANY ADVENTURE

Look no further than the **Rainier ST Apex** for a trailer tire that can handle any off-road adventure. Featuring a rugged tread pattern and sturdy sidewall construction, the **Rainier ST Apex** offers exceptional durability and impressive load capacity - making it the perfect choice for off-road enthusiasts.



6-YEAR LIMITED WARRANTY!



AGGRESSIVE TREAD PATTERN

Off-Road Tread Pattern Improves Traction in Mud, Snow, & Wet Conditions.



ROBUST SIDEWALL DESIGN

For Trail-Use and Protection Against Accidental Cuts.



VARIED TREAD PITCH

Designed to Reduce Road Noise.

AGGRESSIVE TREAD PATTERN

For Traction in All Weather Terrains.

OPTIMIZED DESIGN

Off-Road Ability Optimized for Special Trailer Duty.

PROTECTIVE SIDEWALL

Designed for Trail Use and Wear.



Tire Size	Load Range/Ply	Section Width	Overall Diameter	Max Load Capacity	Operating Inflation	Speed Rating
ST215/75R14	D/8	8.5"	26.6"	2,205 LBS.	65 PSI	M-81 MPH
ST235/75R15	C/6	9.26"	28.8"	2,420 LBS.	50 PSI	M-81 MPH
ST235/75R15	D/8	9.26"	28.8"	2,910 LBS.	65 PSI	M-81 MPH
ST225/90R16	E/10	8.67"	31.83"	3,520 LBS.	80 PSI	M-81 MPH

RADIAL OFF-ROAD TIRES

TREDIT
TIRE & WHEEL

Hankook
driving emotion



DYNAPRO AT2 XTREME: CONQUER ANY TERRAIN

The **Hankook Dynapro AT2 Xtreme** is the ultimate all-terrain LT tire designed to conquer severe weather and off-road terrain with unparalleled durability. Engineered for toughness and equipped with multi-directional traction, it ensures unwavering grip in any conditions. Experience the true essence of performance with the **Dynapro AT2 Xtreme**.



MULTI-DIRECTIONAL GROOVES & SIPING

Delivers Boosted Traction in any Direction.



STAGED BLOCK EDGES

Reduces Road Noise, Giving You a Quiet and Comfortable Ride.



CROSS COMBINED SCOOPS ON THE SHOULDER

Boosts Off-Road Grip While High-Depth Sidewall Blocks Resist Cuts.

Tire Size	Load Range/Ply	Section Width	Overall Diameter	Max Load Capacity	Operating Inflation	Speed Rating
LT225/75R16	E/10	8.7"	29.2"	2,680 LBS.	80 PSI	H-130 MPH

RADIAL OFF-ROAD TIRES

GOODYEAR
OFF-ROAD



WHERE INNOVATION MEETS ALL-TERRAIN POWER

Goodyear's **Wrangler**, **Duratrac**, & **Workhorse** series offer cutting-edge innovation with legendary all-terrain durability. These tires are engineered for a smooth ride on the highway and confident control on rugged back roads.

TIRE FEATURES:



DURAWALL™ TECHNOLOGY



VERSATILE OFF-ROAD TRACTION IN WET AND MUDDY CONDITIONS



CONSTRUCTED WITH DUPONT™ KEVLAR

Tire Size	Part #	Load Range/Ply	Section Width	Overall Diameter	Max Load Capacity	Operating Inflation	Speed Rating
LT215/75R15 (WRANGLER)	411-154-177	D/8	8.5"	27.7"	2,095 LBS.	65 PSI	S-112 MPH
LT225/75R16 (DURATRAC)	312-009-142	E/10	8.8"	29.3"	2,680 LBS.	80 PSI	Q-99 MPH
LT225/75R16 (WORKHORSE)	481-748-855	E/10	8.8"	29.3"	2,680 LBS.	80 PSI	S-112 MPH



RADIAL-LIKE PERFORMANCE WITH ECO-FRIENDLY INNOVATION

The **Eco-Trail ST** Bias is designed with a truly revolutionary tread design that gives the appearance and footprint similar to a radial trailer tire. An engineered compliance to RoHS Regulation that limits or eliminates hazardous substances dangerous to the environment and people, the **Eco-Trail ST** combines sensibility with performance under the high loads and rigorous demands of an ST tire.



2-YEAR LIMITED WARRANTY!

- **MODERN TREAD DESIGN**
- **REINFORCED SQUARE SHOULDER TREAD FOR OPTIMUM ROAD CONTACT**
- **ROHS COMPLIANT** (Reduction or elimination of mercury, hexavalent chromium, lead, cadmium, PBB, & PBDE).
- **VARIABLE TREAD PITCH FOR REDUCED ROAD NOISE**

MODERN TREAD DESIGN

Appearance & Footprint Similar to a Radial Trailer Tire.

HIGH LOAD PERFORMANCE

Reinforced Square Shoulder Tread for Optimum Road Contact.

ENGINEERED FOR RESPONSIBILITY

RoHS Regulation that Reduces or Eliminates Hazardous Substances.

SMALL DIAMETER SPECS



Tire Size	Load Range/Ply	Section Width	Overall Diameter	Max Load Capacity	Operating Inflation	Speed Rating
4.80x8	B/4	4.6"	16.5"	585 LBS.	60 PSI	M-81 MPH
4.80x8	C/6	4.6"	16.5"	760 LBS.	90 PSI	M-81 MPH
5.70x8	B/4	5.9"	18.2"	715 LBS.	50 PSI	M-81 MPH
5.70x8	C/6	5.9"	18.2"	910 LBS.	75 PSI	M-81 MPH
4.80x12	B/4	4.6"	20.5"	785 LBS.	60 PSI	M-81 MPH
4.80x12	C/6	4.6"	20.5"	990 LBS.	90 PSI	M-81 MPH
5.30x12	B/4	5.4"	21.5"	885 LBS.	55 PSI	M-81 MPH
5.30x12	C/6	5.4"	21.5"	1,050 LBS.	80 PSI	M-81 MPH
5.30x12	D/8	5.4"	21.5"	1,250 LBS.	105 PSI	M-81 MPH
18.5x8.5-8	C/6	8.6"	18.1"	935 LBS.	50 PSI	M-81 MPH
18.5x8.5-8	D/8	8.6"	18.1"	1,100 LBS.	70 PSI	M-81 MPH
20.5x8.0-10	C/6	8.1"	20.5"	1,105 LBS.	50 PSI	M-81 MPH
20.5x8.0-10	D/8	8.1"	20.5"	1,330 LBS.	70 PSI	M-81 MPH
20.5x8.0-10	E/10	8.1"	20.5"	1,660 LBS.	90 PSI	M-81 MPH
20.5x8.0-10	F/12	8.1"	20.5"	1,670 LBS.	105 PSI	M-81 MPH

STANDARD "ST" SPECS



Tire Size	Load Range/Ply	Section Width	Overall Diameter	Max Load Capacity	Operating Inflation	Speed Rating
ST175/80D13	B/4	6.77"	24.4"	1,100 LBS.	35 PSI	L-75 MPH
ST175/80D13	C/6	6.77"	24.4"	1,360 LBS.	50 PSI	L-75 MPH
ST185/80D13	C/6	7.24"	24.6"	1,480 LBS.	50 PSI	L-75 MPH
ST185/80D13	D/8	7.24"	24.6"	1,730 LBS.	65 PSI	L-75 MPH
ST205/75D14	C/6	7.87"	26.5"	1,760 LBS.	50 PSI	L-75 MPH
ST215/75D14	C/6	7.99"	26.7"	1,870 LBS.	50 PSI	L-75 MPH
ST205/75D15	C/6	7.99"	27.2"	1,820 LBS.	50 PSI	L-75 MPH
ST225/75D15	D/8	8.39"	28.7"	2,540 LBS.	65 PSI	L-75 MPH

STEEL TRAILER WHEELS



STEEL WHEELS

Discover the perfect blend of classic tradition and contemporary sophistication. Engineered for longevity and top-notch performance, these steel wheels are crafted from superior materials to meet the highest standards.



HIGH QUALITY STEEL ALLOW

Adds Strength & Weight Reduction Compared to Other Brands.



ALL WELDS INSPECTED FOR PENETRATION & QUALITY



1-YEAR WARRANTY

Covers Corrosion on Paint, Chrome, and Galvanized Wheels.

STEEL MODULAR



Wheel Size	Rim Contour	Bolt Pattern	Offset	Center Bore	Weight Capacity	Finish(es)
12x4"	JA	5-4.5"	0"	2.95"	1,520 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
12x4"	JA	5-4.5"	+50"	3.19"	1,520 LBS.	PAINTED- WHITE, BLACK, SILVER
13x4.5"	J	5-4.5"	0"	3.19"	1,660 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
14x5.5"	J	5-4.5"	0"	3.19"	2,200 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
15x5"	J	5-4.5"	0"	3.19"	2,200 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
15x5"	J	5-5"	0"	3.19"	2,200 LBS.	PAINTED- WHITE, BLACK, SILVER
15x6"	J	5-4.5"	0"	3.19"	2,860 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
15x6"	J	6-5.5"	0"	4.25"	3,080 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
16x6"	K	6-5.5"	0"	4.25"	3,860 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
16x6"	K	8-6.5"	0"	4.90"	4,480 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
16x6"	K	8-6.5"	+50"	4.90"	3,960 LBS.	PAINTED- WHITE, BLACK, SILVER
16x7"	J	8-6.5"	0"	4.90"	4,400 LBS.	PAINTED- WHITE, BLACK, SILVER
17.5x6.75"	HC	8-6.5"	0"	4.88"	4,805 LBS.	PAINTED- WHITE, BLACK, SILVER
17.5x6.75"	HC	8-6.5"	+08"	4.77"	6,005 LBS.	PAINTED- WHITE, BLACK, SILVER
17.5x6.75"	HC	8-6.5"	+50"	4.77"	6,005 LBS.	PAINTED- WHITE, BLACK, SILVER

STEEL SPOKE



Wheel Size	Rim Contour	Bolt Pattern	Offset	Center Bore	Weight Capacity	Finish(es)
12x4"	JA	4-4"	0"	2.84"	1,520 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
12x4"	JA	5-4.5"	0"	2.95"	1,520 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
13x4.5"	J	4-4"	0"	3.19"	1,660 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
13x4.5"	J	5-4.5"	0"	3.19"	1,660 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
14x5.5"	J	5-4.5"	0"	3.19"	2,200 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
15x5"	J	5-4.5"	0"	3.19"	2,200 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
15x5"	J	5-5"	0"	3.19"	2,200 LBS.	PAINTED- WHITE, BLACK, SILVER
15x5"	J	5-5.5"	0"	4.25"	2,200 LBS.	PAINTED- WHITE, BLACK, SILVER
15x6"	J	5-4.5"	0"	3.19"	2,860 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
15x6"	J	6-5.5"	0"	4.25"	3,080 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
16x6"	K	6-5.5"	0"	4.25"	3,860 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
16x6"	K	8-6.5"	0"	4.90"	4,480 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
16x7"	J	8-6.5"	0"	4.90"	4,400 LBS.	PAINTED- WHITE, BLACK, SILVER

STEEL TRAILER WHEELS

STEEL DIRECTIONAL



Wheel Size	Rim Contour	Bolt Pattern	Offset	Center Bore	Weight Capacity	Finish(es)
12x4"	JA	5-4.5"	0"	3.19"	1,250 LBS.	PAINTED- SILVER
13x4.5"	J	5-4.5"	0"	3.19"	1,480 LBS.	PAINTED- SILVER, GALVANIZED
14x5.5"	J	5-4.5"	0"	3.19"	1,870 LBS.	PAINTED- SILVER, GALVANIZED
15x5"	J	5-4.5"	0"	3.19"	2,150 LBS.	PAINTED- SILVER

STEEL CONVENTIONAL



Wheel Size	Rim Contour	Bolt Pattern	Offset	Center Bore	Weight Capacity	Finish(es)
8x3.75"	I-70	4-4"	0"	2.81"	1,075 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
8x3.75"	I-70	5-4.5"	0"	2.81"	1,075 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
8x7"	I-70	4-4"	0"	2.81"	1,075 LBS.	PAINTED- WHITE, BLACK, TAN, GALVANIZED
8x7"	I-70	5-4.5"	0"	2.81"	1,075 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
10x6"	I-70	4-4"	0"	2.83"	1,650 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
10x6"	I-70	5-4.5"	0"	2.83"	1,650 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
17.5x6.75"	HC	8-6.5"	+19"	4.77"	6,005 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
17.5x6.75"	HC	8-6.5"	-50"	4.77"	6,005 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
17.5x6.75"	HC	8-6.5"	-.31"	4.77"	6,005 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED

STEEL DUALS



Wheel Size	Rim Contour	Bolt Pattern	Offset	Center Bore	Weight Capacity	Finish(es)
16x6"	K	8-6.5"	-5.5"	4.77"	3,860 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
16x6"	K	8-6.5"	-5.5"	4.88"	3,200 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
17.5x6.75"	HC	8-6.5"	-5.59"	4.77"	6,200 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED
17.5x6.75"	HC	8-275mm	-5.50"	8.7"	6,200 LBS.	PAINTED- WHITE, BLACK, SILVER, GALVANIZED

ALUMINUM TRAILER WHEELS



ALUMINUM WHEELS

Discover the unparalleled elegance of Tredit's aluminum wheels, crafted to exceed expectations. Engineered from premium materials, our wheels not only enhance aesthetics, but also deliver exceptional performance. Customize your trailer by choosing from our diverse range of wheel colors and designs, ensuring your trailer reflects your unique taste and personality.

Elevate your journey with Tredit's aluminum wheels- where innovation meets style, every mile of the way.



AUTOMOTIVE GRADE A356 ALUMINUM ALLOY

Provides Superior Strength and Eliminates the Need for Steel Inserts at the Stud Holes.



REDUCTION IN ROLLING MASS

Aluminum Wheels Typically Weigh Less Than Steel- Which Help Improve Your Vehicle's Fuel Economy.



LIFETIME STRUCTURAL WARRANTY (FOR ORIGINAL PURCHASER)
Plus, a 1-Year Finish & Paint Warranty.

AVALANCHE



Gloss Black Machine Silver Full Paint Gloss Black Gun Metal Machine Full Paint Matte Black

Wheel Size	Rim Contour	Bolt Pattern	Offset	Center Bore	Weight Capacity	Finish(es)
10x6"	JA	5-4.5"	0"	2.83"	1,670 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
12x4"	JA	5-4.5"	0"	3.19"	1,520 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
13x5"	J	5-4.5"	0"	3.19"	1,730 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
14x5.5"	J	5-4.5"	0"	3.19"	2,200 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
15x5"	J	5-4.5"	0"	3.19"	2,160 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
15x6"	J	5-4.5"	0"	3.19"	2,540 LBS.	GLOSS BLACK/MACHINE, FULL PAINT GLOSS BLACK, SILVER/MACHINE, GUN METAL/MACHINE
15x6"	J	6-5.5"	0"	3.75"	3,305 LBS.	GLOSS BLACK/MACHINE, FULL PAINT GLOSS BLACK, MATTE BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
16x6"	J	6-5.5"	0"	3.75"	3,640 LBS.	GLOSS BLACK/MACHINE, FULL PAINT GLOSS BLACK, MATTE BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
16x6"	J	8-6.5"	0"	4.90"	4,080 LBS.	GLOSS BLACK/MACHINE, FULL PAINT MATTE BLACK, MATTE BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE

EDGE



Gloss Black Machine Full Paint Gloss Black Silver Machine Gun Metal Machine

Wheel Size	Rim Contour	Bolt Pattern	Offset	Center Bore	Weight Capacity	Finish(es)
12x4"	JA	5-4.5"	0"	3.19"	1,520 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
13x5"	J	5-4.5"	0"	3.19"	1,730 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
14x5.5"	J	5-4.5"	0"	3.19"	2,200 LBS.	GLOSS BLACK/MACHINE, FULL PAINT GLOSS BLACK, SILVER/MACHINE, GUN METAL/MACHINE
15x5"	J	5-4.5"	0"	3.19"	2,160 LBS.	GLOSS BLACK/MACHINE, FULL PAINT GLOSS BLACK, SILVER/MACHINE, GUN METAL/MACHINE
15x6"	J	5-4.5"	0"	3.19"	2,540 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
15x6"	J	6-5.5"	0"	3.75"	2,860 LBS.	GLOSS BLACK/MACHINE, FULL PAINT GLOSS BLACK, SILVER/MACHINE, GUN METAL/MACHINE
16x6"	J	6-5.5"	0"	3.75"	3,640 LBS.	GLOSS BLACK/MACHINE, FULL PAINT GLOSS BLACK, FULL PAINT MATTE BLACK, SILVER/MACHINE, GUN METAL/MACHINE
16x6"	J	8-6.5"	0"	4.90"	4,080 LBS.	GLOSS BLACK/MACHINE, FULL PAINT GLOSS BLACK, FULL PAINT MATTE BLACK, SILVER/MACHINE, GUN METAL/MACHINE
17.5x6.75" (9/16" Stud)	HC	8-6.5"	0"	4.90"	4,850 LBS.	GLOSS BLACK/MACHINE, FULL PAINT GLOSS BLACK, SILVER/MACHINE, GUN METAL/MACHINE

EVOLUTION



Gloss Black Machine Silver Machine Gun Metal Machine Full Paint Gloss Black

Wheel Size	Rim Contour	Bolt Pattern	Offset	Center Bore	Weight Capacity	Finish(es)
12x4"	JA	5-4.5"	0"	2.72"	1,520 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
13x5"	J	5-4.5"	0"	2.72"	1,730 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
14x5.5"	J	5-4.5"	0"	2.72"	2,200 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
15x5"	J	5-4.5"	0"	3.11"	2,160 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
15x6"	J	5-4.5"	0"	3.11"	2,540 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
15x6"	J	6-5.5"	0"	3.68"	3,305 LBS.	GLOSS BLACK/MACHINE, FULL PAINT GLOSS BLACK, SILVER/MACHINE, GUN METAL/MACHINE
16x6"	J	6-5.5"	0"	3.68"	3,640 LBS.	GLOSS BLACK/MACHINE, FULL PAINT MATTE BLACK, SILVER/MACHINE, GUN METAL/MACHINE
16x6"	J	8-6.5"	0"	4.90"	4,080 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
17.5x6.75" (9/16" Stud)	HC	8-6.5"	0"	4.90"	4,850 LBS.	GLOSS BLACK/MACHINE, FULL PAINT GLOSS BLACK, SILVER/MACHINE, GUN METAL/MACHINE

ALUMINUM TRAILER WHEELS

A1411



Wheel Size	Rim Contour	Bolt Pattern	Offset	Center Bore	Weight Capacity	Finish(es)
13x5"	J	5-4.5"	0"	3.19"	1,710 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
14x5.5"	J	5-4.5"	0"	3.19"	2,200 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
15x5"	J	5-4.5"	0"	3.19"	2,160 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
15x6"	J	5-4.5"	0"	3.19"	2,860 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
15x6"	J	6-5.5"	0"	3.75"	2,860 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
16x6"	J	6-5.5"	0"	3.75"	3,640 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
16x6"	J	8-6.5"	0"	4.90"	4,080 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
16x6"	J	8-6.5"	+50"	4.90"	3,860 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE

ALTITUDE



Wheel Size	Rim Contour	Bolt Pattern	Offset	Center Bore	Weight Capacity	Finish(es)
13x5"	J	5-4.5"	0"	3.19"	1,710 LBS.	GLOSS BLACK/MACHINE, MATTE BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
14x5.5"	J	5-4.5"	0"	3.19"	2,200 LBS.	GLOSS BLACK/MACHINE, MATTE BLACK/MACHINE, FULL PAINT MATTE BLACK, SILVER/MACHINE, GUN METAL/MACHINE
15x5"	J	5-4.5"	0"	3.19"	2,160 LBS.	GLOSS BLACK/MACHINE, MATTE BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
15x6"	J	5-4.5"	0"	3.19"	2,540 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
15x6"	J	6-5.5"	0"	3.75"	2,860 LBS.	GLOSS BLACK/MACHINE, MATTE BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
16x6"	J	6-5.5"	0"	3.75"	3,200 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
16x6"	J	8-6.5"	0"	4.90"	3,860 LBS.	GLOSS BLACK/MACHINE, FULL PAINT MATTE BLACK, SILVER/MACHINE, GUN METAL/MACHINE

PINNACLE



Wheel Size	Rim Contour	Bolt Pattern	Offset	Center Bore	Weight Capacity	Finish(es)
13x5"	J	5-4.5"	0"	3.19"	1,730 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
14x5.5"	J	5-4.5"	0"	3.19"	2,200 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
15x5"	J	5-4.5"	0"	3.19"	2,160 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
15x6"	J	6-5.5"	0"	3.75"	2,860 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
16x6"	J	6-5.5"	0"	3.75"	3,520 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
16x6"	J	8-6.5"	0"	4.90"	3,860 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
17.5x6.75" 9/16" Stud	HC	8-6.5"	0"	4.90"	4,850 LBS.	GLOSS BLACK/MACHINE, FULL PAINT GLOSS BLACK, SILVER/MACHINE, GUN METAL/MACHINE

SIDEWINDER



Wheel Size	Rim Contour	Bolt Pattern	Offset	Center Bore	Weight Capacity	Finish(es)
13x5"	J	5-4.5"	0"	3.19"	1,730 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
14x5.5"	J	5-4.5"	0"	3.19"	2,200 LBS.	GLOSS BLACK/MACHINE, FULL PAINT GLOSS BLACK, SILVER/MACHINE, GUN METAL/MACHINE
15x5"	J	5-4.5"	0"	3.19"	2,150 LBS.	GLOSS BLACK/MACHINE, FULL PAINT GLOSS BLACK, SILVER/MACHINE, GUN METAL/MACHINE
15x6"	J	5-4.5"	0"	3.19"	2,860 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
15x6"	J	6-5.5"	0"	3.75"	2,860 LBS.	GLOSS BLACK/MACHINE, FULL PAINT GLOSS BLACK, FULL PAINT MATTE BLACK, SILVER/MACHINE, GUN METAL/MACHINE
16x6"	J	6-5.5"	0"	3.75"	3,640 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
16x6"	J	8-6.5"	0"	4.90"	4,080 LBS.	GLOSS BLACK/MACHINE, FULL PAINT MATTE BLACK, SILVER/MACHINE, GUN METAL/MACHINE

ALUMINUM MOD



Wheel Size	Rim Contour	Bolt Pattern	Stud Size	Offset	Center Bore	Weight Capacity	Finish(es)
15x6"	J	6-5.5"	1/2" & 9/16"	0"	4.25"	3,305 LBS.	POLISHED SILVER/MACHINE
17.5x6.75"	HC	8-6.5"	9/16"	0"	4.90"	4,850 LBS.	POLISHED SILVER/MACHINE
17.5x6.75"	HC	8-6.5"	5/8"	0"	4.77"	6,005 LBS.	POLISHED SILVER/MACHINE

ALUMINUM TRAILER WHEELS

THOROUGHbred



Wheel Size	Rim Contour	Bolt Pattern	Offset	Center Bore	Weight Capacity	Finish(es)
14x5.5"	J	5-4.5"	0"	3.19"	2,200 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
15x5"	J	5-4.5"	0"	3.19"	2,150 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
15x6"	J	5-4.5"	0"	3.19"	2,200 LBS.	GLOSS BLACK/MACHINE, FULL PAINT MATTE BLACK, SILVER/MACHINE, GUN METAL/MACHINE
15x6"	J	6-5.5"	0"	4.25"	2,860 LBS.	GLOSS BLACK/MACHINE, FULL PAINT MATTE BLACK, SILVER/MACHINE, GUN METAL/MACHINE
16x6"	J	6-5.5"	0"	4.25"	3,520 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE
16x6"	J	8-6.5"	0"	4.90"	3,860 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE

T02



Wheel Size	Rim Contour	Bolt Pattern	Offset	Center Bore	Weight Capacity	Finish(es)
15x6"	J	6-5.5"	0"	4.25"	2,860 LBS.	SILVER/MACHINE
16x6"	J	8-6.5"	-5.0"	4.90"	3,750 LBS.	SILVER/MACHINE

T03



Wheel Size	Rim Contour	Bolt Pattern	Offset	Center Bore	Weight Capacity	Finish(es)
14x5.5"	J	5-4.5"	0"	3.19"	2,200 LBS.	BLACK/MACHINE, SILVER/MACHINE
15x5"	J	5-4.5"	0"	3.19"	2,150 LBS.	BLACK/MACHINE, SILVER/MACHINE
15x6"	J	6-5.5"	0"	4.25"	2,830 LBS.	BLACK/MACHINE, SILVER/MACHINE
16x6"	J	6-5.5"	0"	4.25"	3,580 LBS.	BLACK/MACHINE, SILVER/MACHINE

MAGNUM



Wheel Size	Rim Contour	Bolt Pattern	Offset	Center Bore	Weight Capacity	Finish(es)
16x6"	J	8-6.5"	-5.50"	4.77"	4,400 LBS.	BLACK/MACHINE, SILVER/MACHINE

*ALUMINUM DUAL

*INCLUDES BOLT-ON CENTER CAP

AVIATOR



Wheel Size	Rim Contour	Bolt Pattern	Offset	Center Bore	Weight Capacity	Finish(es)
17.5 x 6.75" (for 9/16" Stud)	HC	8-6.5"	0"	4.90"	4,850 LBS.	GLOSS BLACK/MACHINE, FULL PAINT GLOSS BLACK, SILVER/MACHINE, GUN METAL/MACHINE

NAVIGATOR



Wheel Size	Rim Contour	Bolt Pattern	Offset	Center Bore	Weight Capacity	Finish(es)
17.5 x 6.75" (for 5/8" Stud)	HC	8-6.5"	0"	4.77"	6,005 LBS.	GLOSS BLACK/MACHINE, SILVER/MACHINE, GUN METAL/MACHINE

*INCLUDES BOLT-ON CENTER CAP

ACCESSORIES CENTER CAPS

UNMATCHED STYLE & LASTING PROTECTION

Center caps are the perfect finishing touch to any type of trailer wheel, offering both style and durability. Both chrome and/or stainless steel center caps are designed to protect your trailer wheel's hub from dirt and debris, reducing maintenance while extending the life of your wheels.

REDUCED MAINTENANCE

Keeps Contaminants Out, Reducing the Need for Frequent Cleaning and Maintenance of the Hub Area.

PROTECTION FROM DEBRIS

Shields the Wheel Hub from Dirt, Dust, Moisture, and Road Debris, Preventing Premature Wear and Corrosion.

RUST & CORROSION RESISTANCE

Offers Strong Resistance to Rust, Especially in Wet or Salty Conditions.

CHROME CENTER CAPS



106EZ60C

107EZ60BLK

104EZ60C

Part #	Material	Center Bore Fitment	Finish	Includes Chrome Insert (Yes/No)	Insert Color	Installation Method
106EZ	CHROME	3.19"	POLISHED CHROME	NO	N/A	PUSH-THROUGH
106EZ60C	CHROME	3.19"	POLISHED CHROME	YES	CHROME	PUSH-THROUGH
107EZ	CHROME	3.75"	POLISHED CHROME	NO	N/A	PUSH-THROUGH
107EZ60C	CHROME	3.75"	POLISHED CHROME	YES	CHROME	PUSH-THROUGH
107EZ60BLK	CHROME	3.75"	BLACK CHROME	YES	BLACK	PUSH-THROUGH
104EZ	CHROME	4.25"	POLISHED CHROME	NO	N/A	PUSH-THROUGH
104EZ60C	CHROME	4.25"	POLISHED CHROME	YES	CHROME	PUSH-THROUGH
104EZB60	CHROME	4.25"	BLACK CHROME	YES	BLACK	PUSH-THROUGH
105EZ60C	CHROME	4.90"	POLISHED CHROME	YES	CHROME	PUSH-THROUGH
105EZB-60	CHROME	4.90"	BLACK CHROME	YES	BLACK	PUSH-THROUGH

STAINLESS STEEL CENTER CAPS



AC319TT

AC375TTSS

AC490TTSS-BP

Part #	Material	Center Bore Fitment	Finish	Includes Chrome Insert (Yes/No)	Insert Color	Installation Method
AC283TTSS	STAINLESS STEEL	2.83"	POLISHED STAINLESS STEEL	YES	CHROME	PUSH-THROUGH
AC310TTSS	STAINLESS STEEL	3.10"	POLISHED STAINLESS STEEL	YES	CHROME	PUSH-THROUGH
AC319TT	STAINLESS STEEL	3.19"	POLISHED STAINLESS STEEL	YES	BLACK	PUSH-THROUGH
AC319TTSS	STAINLESS STEEL	3.19"	POLISHED STAINLESS STEEL	YES	CHROME	PUSH-THROUGH
AC319TTSS-BP	STAINLESS STEEL	3.19"	PAINTED BLACK	YES	BLACK	PUSH-THROUGH
AC325TTSS	STAINLESS STEEL	3.25"	POLISHED STAINLESS STEEL	YES	CHROME	PUSH-THROUGH
K328TTSS	STAINLESS STEEL	3.28"	POLISHED STAINLESS STEEL	YES	CHROME	PUSH-THROUGH
AC375TT	STAINLESS STEEL	3.75"	POLISHED STAINLESS STEEL	YES	BLACK	PUSH-THROUGH
AC375TTSS	STAINLESS STEEL	3.75"	POLISHED STAINLESS STEEL	YES	CHROME	PUSH-THROUGH
AC375TTSS-BP	STAINLESS STEEL	3.75"	PAINTED BLACK	YES	BLACK	PUSH-THROUGH
AC375NISS-GB	STAINLESS STEEL	3.75"	PAINTED GLOSS BLACK	NO	N/A	PUSH-THROUGH
AC425	STAINLESS STEEL	4.25"	POLISHED STAINLESS STEEL	NO (CLOSED END)	N/A	PUSH-THROUGH
AC425TTSS	STAINLESS STEEL	4.25"	POLISHED STAINLESS STEEL	YES	CHROME	PUSH-THROUGH
AC490TT	STAINLESS STEEL	4.90"	POLISHED STAINLESS STEEL	NO	N/A	PUSH-THROUGH
AC490TT-B	STAINLESS STEEL	4.90"	POLISHED STAINLESS STEEL	YES	BLACK	PUSH-THROUGH
AC490TTSS	STAINLESS STEEL	4.90"	POLISHED STAINLESS STEEL	YES	CHROME	PUSH-THROUGH
AC490TTSS-BP	STAINLESS STEEL	4.90"	PAINTED BLACK	YES	BLACK	PUSH-THROUGH
K515TTSS	STAINLESS STEEL	5.15"	POLISHED STAINLESS STEEL	YES	CHROME	PUSH-THROUGH

ACCESSORIES LUG NUTS

DURABLE. RELIABLE. VERSATILE. EXPLORE OUR COMPLETE LINE OF TRAILER WHEEL LUG NUTS

Ensure safety and performance with our high-quality lug nuts that are built to handle the toughest road conditions. With multiple sizes, thread counts, and finish options, finding the right match for your trailer wheels has never been easier.

CHROME LUG NUTS:

- **Aesthetic Appeal:** Provide a Polished, Glossy Finish that Enhances the Overall Appearance of the Trailer.
- **Corrosion Resistance:** Chrome Plated Lug Nuts Are Highly Resistant to Corrosion- Crutial for Trailer Wheels Exposed to Varying Weather Conditions.

STAINLESS STEEL LUG NUTS:

- **Superior Corrosion Resistance:** Highly Resistant to Rust & Corrosion, Even in Harsh Conditions Like Saltwater Exposure.
- **Durability:** Does Not Flake or Peel Over Time, and can Handle High Temps Without Weakening or Warping- Crutial for Heavy Loads.

CHROME LUG NUTS



YQ91188HT 1954HD 41188BC YQW1012L 76198BC

Part #	Material	Size (Thread Pitch)	Hex (Socket Size)	Length	Finish
1904	CHROME	1/2"- 20	3/4" HEX	1.45"	POLISHED CHROME
1904L	CHROME	1/2"- 20	3/4" HEX	1.75"	POLISHED CHROME
1954HD	CHROME	1/2"- 20	3/4" HEX	1.38"	POLISHED CHROME
1954LHD	CHROME	1/2"- 20	3/4" HEX	1.72"	POLISHED CHROME
1954LHD-BK	CHROME	1/2"- 20	3/4" HEX	1.72"	BLACK CHROME
YQ41188HT	CHROME	1/2"- 20	3/4" HEX	1.4"	POLISHED CRHOM
41188BC	CHROME	1/2"- 20	3/4" HEX	1.4"	BLACK CHROME
69400	CHROME	1/2"- 20	13/16" HEX	1.5"	POLISHED CHROME
69410	CHROME	1/2"- 20	3/4" HEX	1.45"	POLISHED CHROME
YQ1904	CHROME	1/2"- 20	3/4" HEX	1.38"	POLISHED CHROME
YQ1954LHD	CHROME	1/2"- 20	3/4" HEX	1.75"	POLISHED CHROME
YQ91188HT	CHROME	1/2"- 20	13/16" HEX	1.4"	POLISHED CHROME
YQW1012L	CHROME	1/2"- 20	3/4" HEX	1.90"	POLISHED CHROME
76198BC	CHROME	9/16"- 18	7/8" HEX	2"	BLACK CHROME

STAINLESS STEEL LUG NUTS



YQ1904SS YQ1904LSS YQ1904XLSS YQE8LC1012AA YQ3010SS

Part #	Material	Size (Thread Pitch)	Hex Size (Socket Size)	Length	Finish
3004SS	STAINLESS STEEL	1/2"- 20	7/16" HEX	1.88"	POLISHED STAINLESS STEEL
96188SS	STAINLESS STEEL	1/2"- 20	7/8" HEX	2"	POLISHED STAINLESS STEEL
YQ1904LSS	STAINLESS STEEL	1/2"- 20	3/4" HEX	1.66"	POLISHED STAINLESS STEEL
YQ1904SS	STAINLESS STEEL	1/2"- 20	3/4" HEX	1.43"	POLISHED STAINLESS STEEL
YQ1904XLSS	STAINLESS STEEL	1/2"- 20	3/4" HEX	1.88"	POLISHED STAINLESS STEEL
YQE8LC1012AA	STAINLESS STEEL	1/2"- 20	13/16" HEX	1.5"	POLISHED STAINLESS STEEL
3580-130000	STAINLESS STEEL	1/2"- 20	13/16" HEX	1.58"	POLISHED STAINLESS STEEL
3581-130000	STAINLESS STEEL	1/2"- 20	13/16" HEX	1.58"	POLISHED STAINLESS STEEL
3580-140000	STAINLESS STEEL	9/16"- 18	7/8" HEX	1.58"	POLISHED STAINLESS STEEL
3581-140000	STAINLESS STEEL	9/16"- 18	7/8" HEX	1.58"	POLISHED STAINLESS STEEL
YQ3010SS	STAINLESS STEEL	9/16"- 18	7/8" HEX	1.88"	POLISHED STAINLESS STEEL

STEEL FLANGE LUG NUTS



YQ916SSFLN YQ916BLKFN YQ58175FL

Part #	Material	Size (Thread Pitch)	Hex Size (Socket Size)	Length	Finish
YQ916SSFLN	STAINLESS STEEL	9/16"- 18	15/16" HEX	2"	POLISHED STAINLESS STEEL
YQ916BLKFN	STEEL	9/16"- 18	15/16" HEX	2"	PAINTED BLACK
YQ58SSFLN	STAINLESS STEEL	5/8"- 18	15/16" HEX	2"	POLISHED STAINLESS STEEL
YQ58BLKFLN	STEEL	5/8"- 18	15/16" HEX	2"	PAINTED BLACK
YQ58175FL	STEEL	5/8"- 18	15/16" HEX	1"	BLACK STEEL

ACCESSORIES TPMS



REAL-TIME TIRE MONITORING PROTECT YOUR JOURNEY WITH TPMS SOLUTIONS

Maximize the safety and performance of your trailer by integrating our **Bluetooth Tire Pressure Monitoring System (TPMS)** to your trailer tires- keeping you connected to real-time tire pressure and temperature updates- right from your smartphone (through the **Tredit Mobile App**). Travel with peace-of-mind, knowing you can detect potential tire issues before they become a problem.



PAIR SENSORS

Pair Bluetooth TPMS Sensors Through the Tredit App.



MONITOR

Easily Monitor Tire Pressure & Temperature in Real-Time.



NOTIFICATIONS


Receive Notifications Through Your Phone When Tire PSI & Temps are at Unsafe Levels.

PAIRING INSTRUCTIONS:




STEP 1

Tap **+ ADD TRAILER** and enter your trailer/tire information. The app allows for multiple trailers to be added and saved to your account.

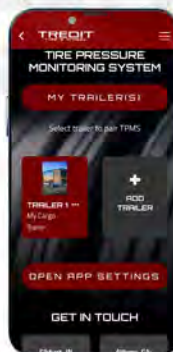

STEP 2

Once you have created/saved your trailer profile, select the trailer you wish to pair (**if there are multiple trailers saved**). This will take you to your TPMS Sensor Readings.

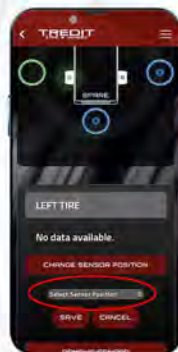

STEP 3

Make sure your phone's Bluetooth is turned on. Tap the **+** icon next to the trailer illustration to begin scanning for TPMS sensor device.

On the initial set-up, there needs to be a small change in air pressure for the app to locate and connect to the TPMS sensor. This small change in air pressure should make that sensor name pop to the top of the list for you to select and pair.

If you end up selecting/pairing to the incorrect sensor shown next to the desired trailer placeholder, tap on the paired placeholder and select **"Change Sensor Position"** to relocate the sensor to the correct position.



STEP 4

The green checkmark indicates the sensors have been successfully paired.

The live PSI readings are shown adjacent to the trailer diagram. If enabled, a notification will be sent to your phone if the trailer tire PSI drops below its recommended PSI inflation range.

The rings around the PSI amounts indicate the live tire temperatures:

- **Green:** Tire is within the recommended temperature range.
- **Yellow:** Tire is at a moderate temperature level. Within this temp, level, you should consider pulling over to check the tires.
- **Red:** Tire is at a high temperature level and should not be in operation.

ACCESSORIES BALANCING BEADS



COUNTERACT BALANCING BEADS: DRIVE FARTHER, RUN COOLER, SAVE MORE

Counteract Balancing Beads are the leading method for balancing tires and complete wheel assemblies - delivering unmatched performance and value. Designed to keep your trailer tires running smoother, cooler, and more efficiently, **Counteract Balancing Beads** will save you money and extend the tire life with every mile.

TPMS COMPATIBLE

Fully Compatible with Tire Pressure Monitoring Systems.

INCREASE TIRE LIFE

Reduces Vibrations and Rolling Resistance- Increasing Tire Lifespan by **30%** and Reducing Rolling Resistance by **18%**.

QUICK & EASY INSTALLATION

The Clean Throw-In-Bag Method Allows for Effortless Installation.

WHY CHOOSE COUNTERACT BALANCING BEADS?



IMPROVE FUEL ECONOMY

Counteract is the only balancing product in the world proven to increase fuel economy. Counteract has demonstrated savings of at least 2.2% in two separate SAE J1321 and TMC RP-1102 Type II Fuel Tests. Don't believe us? You can download and review the tests yourself at www.cbbtests.com



REDUCE VIBRATION

There is more to balance than just the tire and wheel. Counteract's unique technology will also balance everything rotating on the axle end including the brake drum and hub, while readjusting itself on the go when experiencing new and changing out of balance conditions. Something wheel weights cannot do.



REDUCE MAINTENANCE COSTS

Heavy vibration for extended periods of time is one of the leading causes of maintenance issues. On average it takes 10-12 minutes to balance a transport truck tire with wheel weights. Using Counteract, it only takes the time needed to mount the tire.



INCREASE TIRE LIFE

Counteract Balancing Beads reduces rolling resistance of the tire up to 18%. This in turn, reduces tire wear. When a tire and complete wheel assembly is properly balanced, on average Counteract is known to increase tire life by at least 30%.



TROUBLE FREE AND GUARANTEED

Counteract Balancing Beads is the best overall method of balancing truck tires and complete wheel assemblies in the world today. If you don't agree after trying your first case, you don't have to pay for it.



ENVIRONMENTALLY FRIENDLY

Counteract is manufactured from recycled tempered glass, utilizing minimal new raw materials. The beads are 99.9% glass with a special coating that allows them to repel and resist moisture. Lead weights commonly fall off the rim while driving damaging the surrounding environment, where counteract remains inside for the life of the tire.

JUST THROW IT IN!



HOW DO

COUNTERACT BALANCING BEADS WORK?

The balancing beads are distributed around the tire as it begins to roll, through centrifugal force. As the centrifugal force increases, the heavy spot pulls up & down on the suspension, making the beads move in the opposite direction of the downward & upward motion, through inertia. The beads continue to migrate until the complete wheel assembly is balanced.

BEFORE INSTALLING COUNTERACT



AFTER INSTALLING COUNTERACT



The background is a solid red color with various abstract elements. There are numerous dark red and black splatters, dots, and streaks scattered across the surface. A prominent feature is a large, diagonal grid of squares, outlined in a slightly darker red, which covers the lower right portion of the image. The overall aesthetic is dynamic and textured.

TREDIT

TIRE & WHEEL